
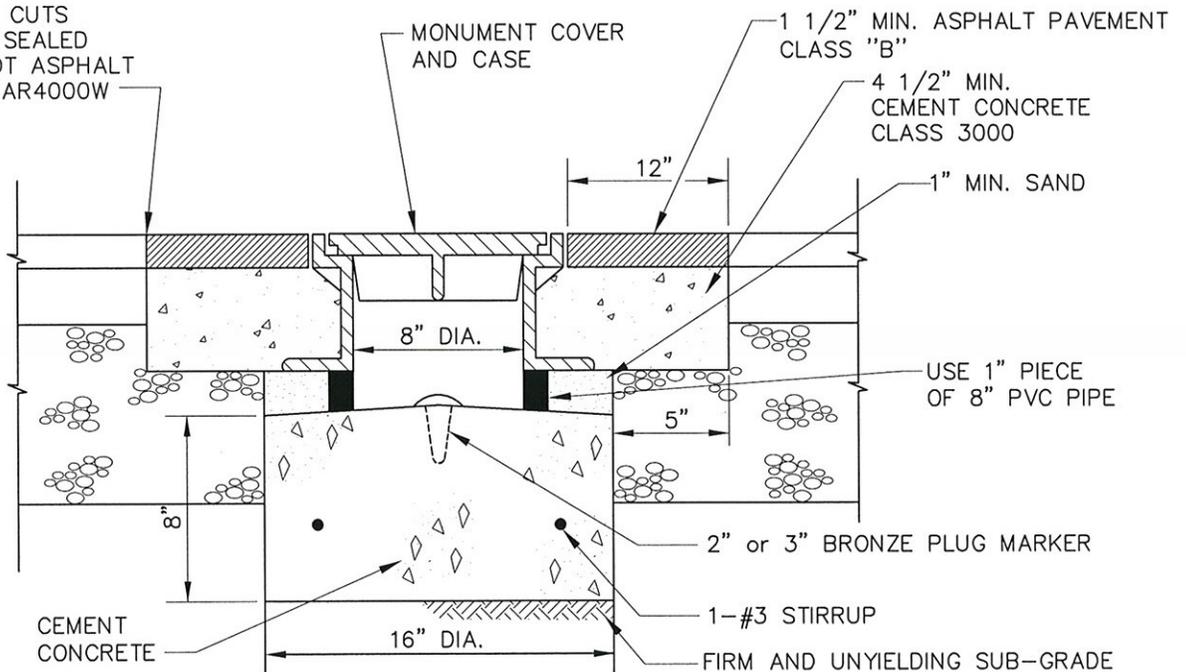


NOTES:

1. MACHINE BEARING FACES OF COVER AND CASE TO INSURE POSITIVE FIT.
2. MATERIAL SHALL CONFORM TO THE CURRENT WSDOT STANDARD SPECIFICATIONS.
3. PLUG SHALL BE STAMPED BY A WASHINGTON STATE LICENSED SURVEYOR.

NEAT LINE CUTS SHALL BE SEALED WITH A HOT ASPHALT EMULSION AR4000W



Approved:  June 17, 2005
 City Engineer Date
STREET STANDARD DETAIL



Dwg No: **S7**
POURED IN PLACE MONUMENT