

6" MIN. CEMENT CONCRETE
CLASS 3000

6"X6" STEEL MESH
SUPPORTED ON 2" DOBIE

MATCH EXISTING
DRIVEWAY GRADE

5 1/2"
1/2"

2% MAX.


BASE COURSE, SEE S11
TYPICAL SECTION DETAIL

4" CRUSHED SURFACING
TOP COURSE

BACK OF
PROPERTY
LINE
SIDEWALK

SECTION A-A

WIDTH VARIES
FOR RESIDENTIAL
OR COMMERCIAL

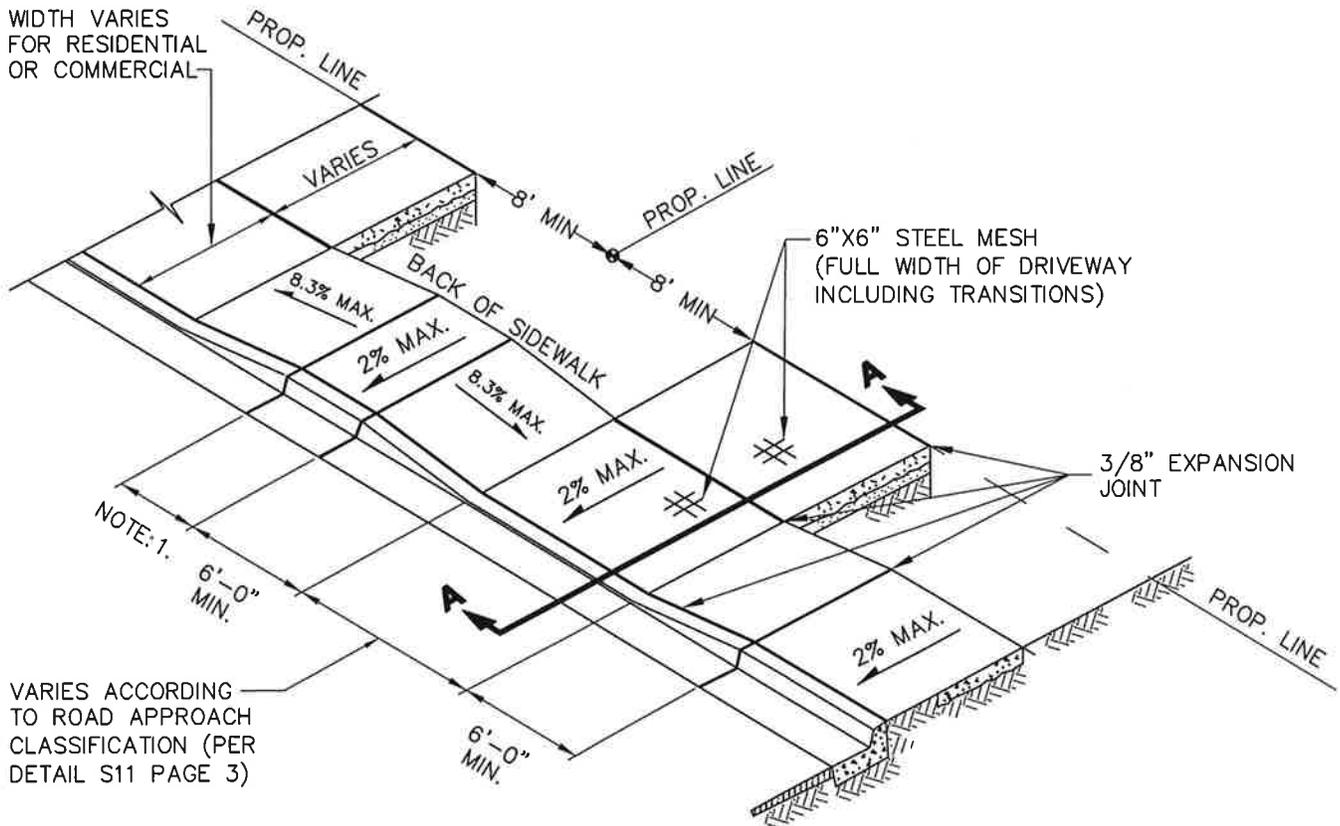

VARIES ACCORDING
TO ROAD APPROACH
CLASSIFICATION (PER
DETAIL S11 PAGE 3)

NOTES:

1. UNLESS OTHERWISE APPROVED, A MINIMUM OF 4 FEET OF FULL HEIGHT CURB IS REQUIRED BETWEEN TAPER SECTIONS OF DRIVEWAYS.

Approved:

June 17, 2015

City Engineer

Date

STREET STANDARD DETAIL



Dwg No:

S9

CEMENT CONCRETE
DRIVEWAY